

XFP Transceivers – 10 Gbps

Description:

The OPTOKON Small Form Factor 10Gb/s (XFP) transceivers are compliant with the current XFP Multi-Source Agreement (MSA) Specification. Digital diagnostics functions are available via a 2-wire serial interface, as specified in the XFP MSA. The transceiver is RoHS compliant and leads free per Directive 2002/95/EC



	Unit	SR	LR	ER	ER60	ZR	ZR+
Average output power (min / max)	dBm	-6 / -1	-6 / -1	-1 / 4	0 / 5	0 / 5	1 / 5
Receiver sensitivity	dBm	-10	-15	-16,5	-20	-24	-25
Overload	dBm	0,5	0,5	0,5	-6	-6	-6
Maximum distance	km	0,300	10	40	60	80	100
Fiber type	-	MMF	SMF	SMF	SMF	SMF	SMF
Optical link budget	dBm	4	9	15,5	20	24	26
Wavelength / laser type	nm	850 / VCSEL	1310/DFB	1550 / DFB	1270/1310 (Bidi) 1310/1270 (Bidi) DFB	1550 / EML	1550 / EML

Table 1: Basic technical specifications according to distance.

Temperature:

OPTOKON is always trying to satisfy as much market demand as possible and with this in mind, almost all OPTOKON XFP transceivers are manufactured in the **C**ommercial, **E**xtended and **I**ndustrial temperature ranges to provide you all possibilities you need for your application.

Code	Temperature
D	0 °C to + 70 °C
E	-10°C to + 80 °C
I	-40°C to + 85 °C

Table 2: Temperature specifications.

Safety and regulatory compliance

Electrostatic discharge (ESD)	IEC/EN 61000-4-2
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN 55022 Class B (CISPR 22A)
Laser Eye Safety	Class 1 laser product
Component Recognition	IEC/EN 60950, UL
ROHS	2002/95/EC
EMC	EN 61000-3

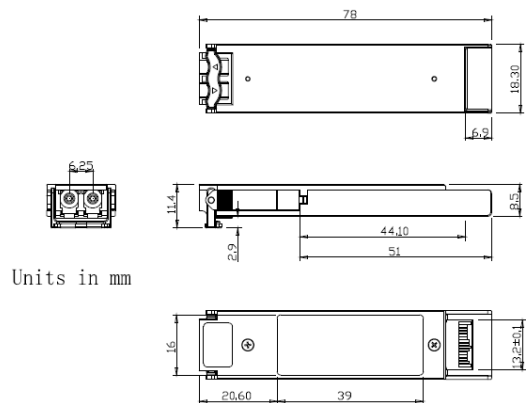


Figure 1: Transceiver dimensions schema.

Digital diagnostics:

All OPTOKON XFP transceivers are assembled with digital diagnostic feature as a standard.



Ordering codes for 10 Gbps XFP transceivers:

Standard series:

Part number:	Speed [Gbps]	Distance dd [km]	Wavelength [nm]	Temperature [-]	Fiber type [-]	Connector [-]
M10-V85-XP-SX-D-XX	10	0,300	850	D, E, I	MMF	LC
S10-D31-XP-LR-D-XX	10	10	1310	D, E, I	SMF	LC
S10-D55-XP-ER-D-XX	10	40	1550	D, E, I	SMF	LC
S10-D55-XP-ZR-D-XX	10	80	1550	D	SMF	LC
S10-D55-XP-ZR+-D-XX	10	100	1550	D	SMF	LC

Bidirectional series:

Part number:	Speed [Gbps]	Distance dd [km]	Wavelength [-]	Temperature [-]	Fiber type [-]	Connector [-]
S10-W27/33-XP-LR-D-XX	10	10	1270	D	SMF	LC
S10-W33/27-XP-LR-D-XX	10	10	1330	D	SMF	LC
S10-W27/33-XP-ER-D-XX	10	40	1270	D	SMF	LC
S10-W33/27-XP-ER-D-XX	10	40	1330	D	SMF	LC
S10-W33/27-XP-ER60-D-XX	10	60	1330	D	SMF	LC
S10-W27/33-XP-ER60-D-XX	10	60	1270	D	SMF	LC
S10-W49/55-XP-ZR-D-XX	10	80	1490	D	SMF	LC
S10-W55/49-XP-ZR-D-XX	10	80	1550	D	SMF	LC

CWDM series:

Part number:	Speed [Gbps]	Distance dd [km]	Wavelength [nm]	Temperature [-]	Fiber type [-]	Connector [-]
S10-Cyy-XP-LR-D-XX	10	10	CWDM1270~1610	D	SMF	LC
S10-Cyy-XP-ER-D-XX	10	40	CWDM 1270~1370 CWDM 1470~1610	D	SMF	LC
S10-Cyy-XP-ER60-D-XX	10	60	CWDM 1270~1330		SMF	LC
S10-Cyy-XP-ZR-D-XX	10	80	CWDM 1470~1610	D	SMF	LC

DWDM series:

Part number ¹⁾ :	Speed [Gbps]	Distance dd [km]	Wavelength [-]	Temperature [-]	Fiber type [-]	Connector [-]
S10-Dxx xx-SP-ER-D-XX	10	40	DWDM	D	SMF	LC
S10-Dxx xx-SP-ZR-D-XX	10	80	DWDM	D	SMF	LC

1) xx xx means last 4 digits of DWDM wavelength. **Example:** For channel C17 of DWDM use 63 86 in ordering code

CWDM laser code

yy [-]	Wavelength [nm]	Clasp Color [-]	yy [-]	Wavelength [nm]	Clasp Color [-]
27	1270	Gray	45	1450	Brown
29	1290	Gray	47	1470	Gray
31	1310	Gray	49	1490	Purple
33	1330	Purple	51	1510	Blue
35	1350	Blue	53	1530	Green
37	1370	Green	55	1550	Yellow
39	1390	Yellow	57	1570	Orange
41	1410	Orange	59	1590	Red
43	1430	Red	61	1610	Brown

Table 3: CWDM ordering code.

Distance & temperature codes

dd code [-]	Distance [km]
SR	0.5
LR	10
ER	40
ER60	60
ZR	80
ZR+	100

Table 5: distance table

Code	Temperature
D	-5 °C to + 70 °C
E	-10 °C to + 80 °C
I	-40 °C to + 85 °C

Table 6: Temperature codes.

DWDM laser code

Ch [-]	Frequency [THz]	Wavelength [nm]	Ch [-]	Frequency [THz]	Wavelength [nm]
C17	191,7	1563,86	C40	194,0	1545,32
C18	191,8	1563,05	C41	194,1	1544,53
C19	191,9	1562,23	C42	194,2	1543,73
C20	192,0	1561,42	C43	194,3	1542,94
C21	192,1	1560,61	C44	194,4	1542,14
C22	192,2	1559,79	C45	194,5	1541,35
C23	192,3	1558,98	C46	194,6	1540,56
C24	192,4	1558,17	C47	194,7	1539,77
C25	192,5	1557,36	C48	194,8	1538,98
C26	192,6	1556,55	C49	194,9	1538,19
C27	192,7	1555,75	C50	195,0	1537,40
C28	192,8	1554,94	C51	195,1	1536,61
C29	192,9	1554,13	C52	195,2	1535,82
C30	193,0	1553,33	C53	195,3	1535,04
C31	193,1	1552,52	C54	195,4	1534,25
C32	193,2	1551,72	C55	195,5	1533,47
C33	193,3	1550,92	C56	195,6	1532,68
C34	193,4	1550,12	C57	195,7	1531,90
C35	193,5	1549,32	C58	195,8	1531,12
C36	193,6	1548,51	C59	195,9	1530,33
C37	193,7	1547,72	C60	196,0	1529,55
C38	193,8	1546,92	C61	196,1	1528,77
C39	193,9	1546,12			

Table 4: DWDM orderign code.