

## IGS-S2804TM

28x 100/1000Base SFP with 4x GbE Combo (RJ45/SFP)



- Supports IEEE1588 PTP v2
- Supports u-Ring, ERPS, MSTP, RSTP,STP for redundant cabling
- UL60950-1, EN60950-1, CE, FCC, EN50121-4, EN61000-6-2, EN61000-6-4 certified
- Supports negative voltage power input



Ver.2022 Jan

IGS-S2804TM is an industrial grade, hardened design, L2 switch, equipped with 28 GbE SFP ports with 4 combo GbE ports. This model is a fanless design with redundant, isolated power supplies (2 AC, 2 DC, AC + DC) and can be mounted in 19-inch EIA standard rack. IGS Series are certified with many industrial-grade standards and are ideal for deployments in harsh environments to deliver mission-critical network services. The managed Ethernet switch is an ideal solution of Industrial automation, smart city & surveillance, Intelligent traffic control systems and production automation applications. (See figure).

### Features

- Redundancy isolated low voltage 24/48/-48VDC, or/and isolated High voltage (110/220 VAC) power inputs
  - STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
  - Provides 5 instances that each can support μ-Ring, μ-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC Union μ-Ring white paper for more details and more topology application)
  - μ-Ring for Redundant Cabling, recovery time<50ms in 250 devices
  - Provides SmartConfig for quick and easy mass Configuration\*
  - Supports SmartView™ for Centralized Management\*
- \*Please see Chapter 1- **Software Management** for more details

### Specifications

<b>Standard</b>	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)	
<b>VLAN ID</b>	4094	IEEE 802.1Q VLAN VID
<b>Switch Architecture</b>	Back-plane (Switching Fabric): 56Gbps (Full wire-speed)	
<b>Data Processing</b>	Store and Forward	
<b>Network Connector</b>	28x 100/1000Base-X SFP with 4x GbE Combo (UTP/ SFP)	
<b>Network Connector</b>	Port 25~28 GbE SFP support 1000M Port 21~24 GbE SFP/RJ45 UTP combo (dual speed 100/1000M) Port 1~20 GbE SFP support dual speed (100/1000M) SFP support 100/1000M dual speed with DDMI RJ-45 UTP port support 10/100/1000Base-T(X), Auto negotiation speed, Auto MDI/MDI-X function	
<b>Console</b>	RS-232 (RJ-45)	
<b>Network Cable</b>	UTP/STP Cat. 5e cable or above EIA/TIA-568 100-ohm (100meter)	
<b>Protocols</b>	CSMA/CD	
<b>Reverse Polarity Protection</b>	Supported	

<b>Overload Current Protection</b>	Supported										
<b>CPU Watch Dog</b>	Supported										
<b>Power Supply</b>	Redundant 2x isolated High Voltage AC/DC input power (-AA model) Redundant 2x Isolated Low Voltage DC Input power (-DD model)										
<b>Power Supply</b>	Redundant 1x isolated Low Voltage DC and 1x High Voltage AC/DC input power (-AD model) Low Voltage DC (D): Isolated 24/48/-48VDC (18~60VDC), Removable Terminal Block High voltage AC/DC (A): Isolated 110/220VAC (85VAC~264VAC) Supports negative voltage power input (for example in telecom system)										
<b>Power Consumption</b>	<table border="1"> <thead> <tr> <th>Input Voltage</th> <th>IGS-S2804TM</th> </tr> </thead> <tbody> <tr> <td>24VDC</td> <td>33.1W</td> </tr> <tr> <td>48VDC</td> <td>33.4</td> </tr> <tr> <td>110VAC</td> <td>34.4W</td> </tr> <tr> <td>220VAC</td> <td>34.4W</td> </tr> </tbody> </table>	Input Voltage	IGS-S2804TM	24VDC	33.1W	48VDC	33.4	110VAC	34.4W	220VAC	34.4W
Input Voltage	IGS-S2804TM										
24VDC	33.1W										
48VDC	33.4										
110VAC	34.4W										
220VAC	34.4W										
<b>LED</b>	Per unit: Power 1 (Green), Power 2 (Green), Act /Alarm (Green/Red), Ring Master (Green) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Yellow) SFP (P1~24) Fiber Per port: 100Base-X Link/Active (Green) 1000Base-X Link/Active (Yellow) SFP+ (P25~P28) Fiber Per port: 1000Base-X Link/Active (Amber)										
<b>Jumbo Frame</b>	10K										
<b>MAC Address Table</b>	32K										
<b>Memory Buffer</b>	4M Bytes for packet buffer										
<b>Device Memory</b>	16M Bytes Flash ROM, 1G Bytes RAM										
<b>Warning Message</b>	System Syslog, SMTP/ e-mail event message, alarm relay										
<b>Alarm Relay Contact</b>	Relay outputs with current carrying capacity of 1 A @24VDC, 2-Pin removable terminal block										
<b>Operating Temperature</b>	-10 ~ 60°C (IGS-S2804TM) -40 ~ 75°C (IGS-S2804TM-E)										

<b>Operating Humidity</b>	5% to 95% (Non-condensing)
<b>Storage Temperature</b>	-40 ~ 85°C
<b>Housing</b>	Rugged Metal, IP30 Protection, Fanless
<b>Dimensions</b>	315 x 440 x 44 mm (D x W x H)
<b>Weight</b>	4.755kg (IGS-S2804TM-AA) 4.26kg (IGS-S2804TM-DD) 4.51kg (IGS-S2804TM-AD)
<b>Installation Mounting</b>	19" rack mount
<b>MTBF</b>	208,975 Hours (IGS-S2804TM-AA) 230,276 Hours (IGS-S2804TM-DD) 287,541 Hours (IGS-S2804TM-AD)
<b>Warranty</b>	5 years
<b>Certification</b>	
<b>EMC</b>	CE (EN55024, EN55032)
<b>EMI (Electromagnetic Interference)</b>	FCC Part 15 Subpart B Class A, CE
<b>Railway Traffic</b>	EN50121-4

<b>Immunity for Heavy Industrial Environment</b>	EN61000-6-2
<b>Emission for Heavy Industrial Environment</b>	EN61000-6-4
<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
<b>Safety</b>	UL60950-1, EN60950-1
<b>Shock</b>	IEC 60068-2-27
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC 60068-2-6


## Software Specifications

<b>Topology</b>	
<b>VLAN</b>	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR ( Multicast VLAN Registration)
<b>Link Aggregation (Port Trunk)</b>	Static (Hash with SA, DA, IP, TCP/UDP port), up to 14 trunk group Dynamic (IEEE 802.3ad LACP), up to 14 trunk group Per group up-to 8 port
<b>Spanning Tree</b>	IEEE 802.1d STP, IEEE 802.1w RSTP, IEEE 802.1s MSTP
<b>Multiple μ-Ring</b>	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. Recovery time <50ms The maximum number of devices allowed in a Ring supported ring is 250.
<b>Loop Protection</b>	Supported
<b>ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)</b>	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
<b>QoS Features</b>	
<b>Class of Service</b>	IEEE 802.1p 8 active priorities queues per port
<b>Traffic Classification QoS</b>	IEEE 802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
<b>Bandwidth Control for Ingress</b>	Per port based
<b>Bandwidth Control for Egress</b>	Per port based Per queue / Per port shaper
<b>DiffServ (RF 2474) Remarketing</b>	
<b>Storm Control</b>	for Unicast, Broadcast, Multicast
<b>IP Multicasting Features</b>	
<b>IGMP / MLD Snooping</b>	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile
<b>IGMP / MLD Snooping</b>	Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
<b>Security Features</b>	
<b>IEEE 802.1X</b>	Port-Based, MAC-Based

<b>ACL</b>	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4: TCP/UDP
<b>RADIUS authentication &amp; accounting</b>	
<b>TACACS+ authentication &amp; accounting, TACACS+ 3.0</b>	
<b>HTTPS, HTTP</b>	Supported
<b>SSL / SSH v2</b>	Supported
<b>User Name Password Authentication</b>	Local Authentication Remote Authentication (via RADIUS / TACACS+)
<b>Management Interface Access Filtering</b>	Web, Telnet / SSH , CLI RS-232 console
<b>Management Features</b>	
<b>CLI</b>	Cisco® like CLI
<b>Web Based Management</b>	
<b>Telnet</b>	Server
<b>SNMP</b>	V1, V2c, V3
<b>SW &amp; Configuration Upgrade</b>	TFTP, HTTP Redundant firmware in case of upgrade failure
<b>RMON</b>	RMON I (1, 2, 3, 9 group), RMON II
<b>MIB</b>	RFC1213 MIB II, Private MIB
<b>UPnP</b>	Supported
<b>DHCP</b>	Server, Client, Relay, Relay option 82 , Snooping
<b>IP Source Guard</b>	Supported
<b>Port Mirroring</b>	Supported
<b>Event Syslog</b>	Syslog server (RFC3164)
<b>Warning Message</b>	System syslog, e-mail, alarm relay
<b>DNS</b>	Client, Proxy
<b>IEEE 1588 PTP V2</b>	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
<b>NTP, SNTP</b>	Client
<b>LLDP (IEEE 802.1ab)</b>	Link Layer Discovery Protocol LLDP-MED
<b>IPv6 Features</b>	
<b>IPv6 Management</b>	Telnet Server/ICMP v6
<b>SNMP over IPv6</b>	Supported
<b>HTTP over IPv6</b>	Supported
<b>SSH over IPv6</b>	Supported
<b>IPv6 Telnet</b>	Supported
<b>IPv6 NTP, SNTP</b>	Client
<b>IPv6 TFTP</b>	Supported
<b>IPv6 QoS</b>	Supported
<b>IPv6 ACL</b>	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP


## Application

Figure : Application Example

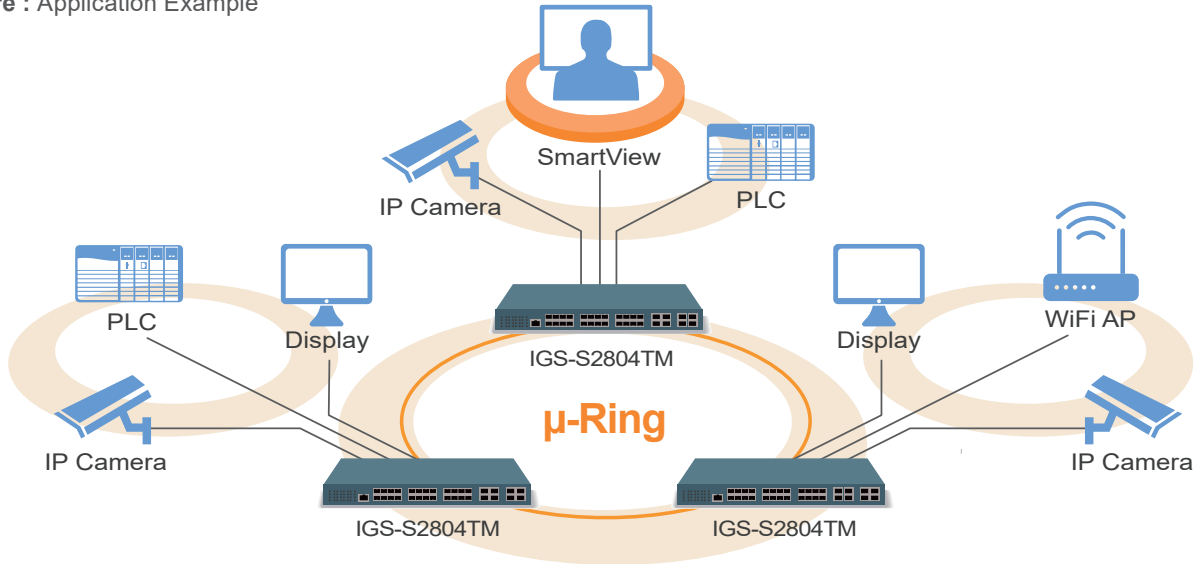


## Dimensions


Rear View

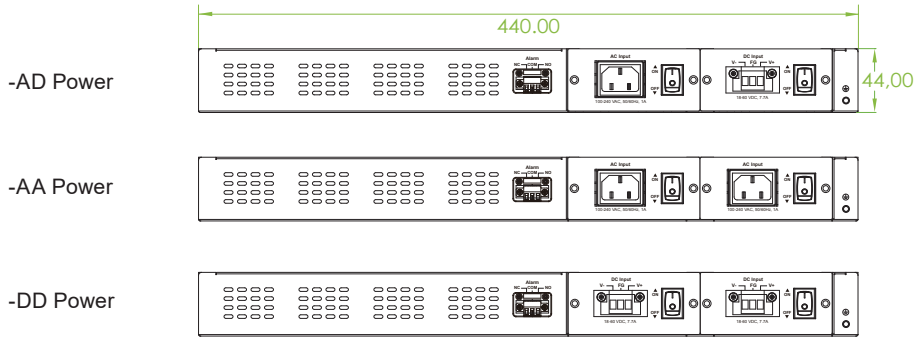


Front View

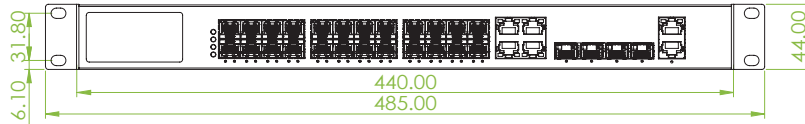

Top View

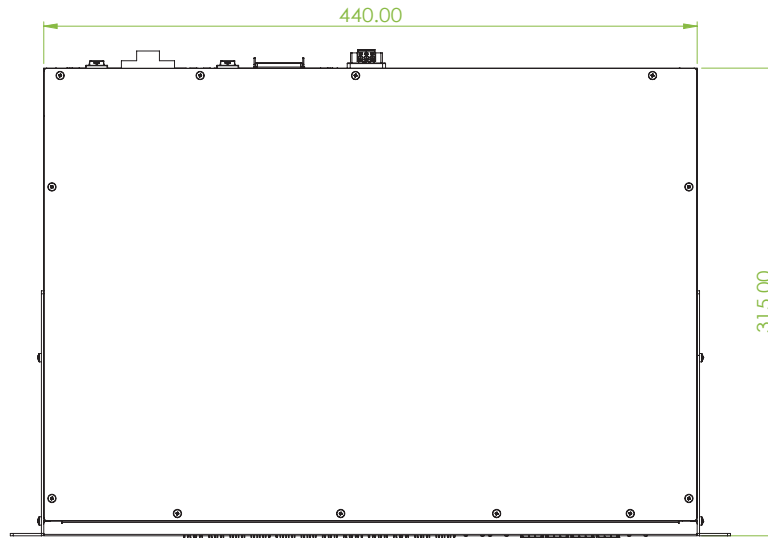

Side View



3

Industrial Managed GbE Switch(Rack) IGS-S2804TM

## Ordering Information

Model Name	Managed	Total Port	SFP (1~20)	Combo Port (21~24)	Extension Port (25~28)	Input Power		Certification				Operating Temperature
			100/1000Base-X SFP	10/100/1000Base-T UTP or 100/1000Base-X SFP	1000 Base-X SFP	DC (Low Volt) 24/48/48VDC	High Volt 110/240VAC	Railway EN50121-4	Safety UL60950-1 EN60950-1	EN61000-6-2 EN61000-6-4	CE FCC	
IGS-S2804TM-AA	V	28	20	4	4 SFP		2	V	V	V	V	-10~60°C
IGS-S2804TM-DD	V	28	20	4	4 SFP	2		V	V	V	V	-10~60°C
IGS-S2804TM-AD	V	28	20	4	4 SFP	1	1	V	V	V	V	-10~60°C
IGS-S2804TM-EAA	V	28	20	4	4 SFP		2	V	V	V	V	-40~75°C
IGS-S2804TM-EDD	V	28	20	4	4 SFP	2		V	V	V	V	-40~75°C
IGS-S2804TM-EAD	V	28	20	4	4 SFP	1	1	V	V	V	V	-40~75°C

### ■ Package List

- IGS-S2804TM device
- Console cable (RJ-45 to DB9)
- Rack mount ear with screws
- AC Power cord (for AC power -A model)

## Optional Accessories

### ■ Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

### ■ Industrial Power Supply

NDR-120-48	Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 120W, -20 ~ +70°C (For DC type)
------------	---

### ■ Industrial Optical Fiber Bypass Switch

IBP-202	Optical Fiber Bypass Switch
---------	-----------------------------